


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	COM1				L	1	5AGD 6BE	10	2D	2C	3D	3C	4D	4C	20	CV
COM2		COM2			R	2	1E	1C	2F	2B	3F	3B	4F	4B	OK	KG
COM3			COM3		5BC/P2 6A/PCD	3	6G	1B	2E	2G	3E	3G	4E	4G	BATT	LB
COM4				COM4	RX	4	1AGD	5	AVG	2A	StDev	3A	P1	4A	CAL	ERR

NOTES:

1. DISPLAY TYPE: TN.
2. VIEWING DIRECTION: 6 O'CLOCK.
3. DRIVE METHOD: 1/4DUTY, 1/3BIAS.
4. OPERATING VOLTAGE: 3.0 V
5. POLARIZER MODE: TRANSMISSIVE/POSITIVE.
6. OPERATING TEMP: 0 ~ +50°C.
7. STORAGE TEMP: -10 ~ +60°C.
8. CONNECTOR: PIN

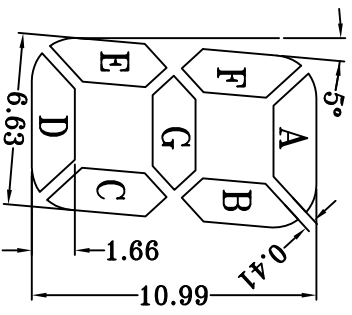

TITLE		L C D	
PROJECTION			
DRWN	DATE		
CHK	DATE		
APVD	DATE		
UNITS	mm	SCALE	/
MODEL		REVISION	
		0	
SHEET		1/1	